

PPC-1510



Convertible & effective 15" TFT Panel PC/Kit-in-One solution

Feature

- 15" color TFT high brightness LCD display
- Support Socket 370 processor
- Up to 512 MB SDRAM
- One 10BASE-T/100BASE-TX Ethernet
- Simultaneously utilizing PCI and PC/104 expansion slot
- Medical certificate

System

CPU	Pentium® III or Celeron® processor up to 1 GHz
System Memory	Up to 512 MB SDRAM on one 168-pin DIMM socket
L2 Cache Memory	256 KB
Chipset	VIA Apollo Pro 133A, VT82C694X
BIOS	Award (2 Mb Flash ROM)
VGA	SMI Lynx3DM SM721
SSD	One type II CompactFlash socket
HDD Type	One 3.5" drive
FDD Type	One slim type drive
CD-ROM Drive	One slim type drive, 24x or above
DVD-ROM Drive	Optional, 6x or above
Watchdog Timer	Programmable via software from 32 sec. to 254 min., 1 min./step
Expansion Interface	PC/104 x 1, PCI x 1
Power Supply	Output: 70W; Input: 90~264V AC
Operating Temperature	0 to 45°C
Relative Humidity	10 to 95%, non-condensing
Dimension (WxHxD)	420 x 320 x 98 mm; 16.54" x 12.6" x 3.86"
Weight	9 kg; 20.25 lbs

LCD Display


Resolution	1024 x 768
Brightness	250 cd/m ²
Viewing Angle	150°
Contrast Ratio	350
Lamp Life	40,000 hrs.

Mounting


Optional Swing Arm, Mini Arm

I/O

COM port	RS-232 x 3, RS-232/422/485 x 1
Ethernet	Dual Intel® 82559ER, 10BASE-T/100BASE-TX, RJ-45 x 2
Audio	AC '97 2.0
USB	2
Parallel Port	1
Mouse & KB	1

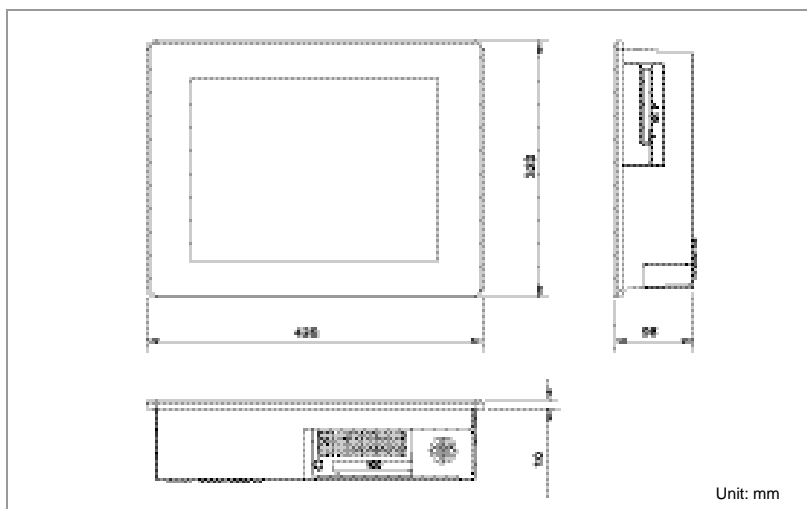

Unit: mm

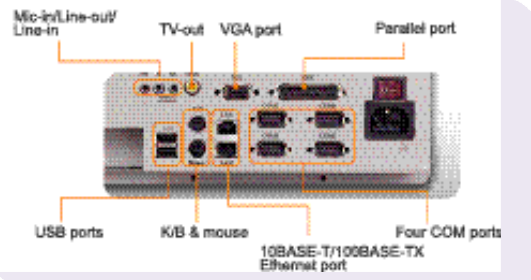

Ordering Guide

PPC-1510T	15" TFT Panel PC with ROBO-603 and resistive touch screen
PPC-1510	15" TFT Panel PC with ROBO-603